
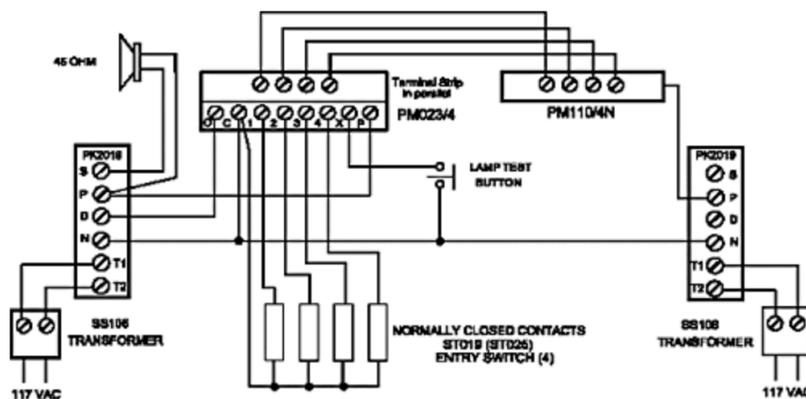


TekTip: DS100 Wiring Application: DS100 with CM800 panel connected in parallel

The standard DS100 system configuration typically includes one annunciator. However, it is possible to connect a CM800 panel in parallel to provide an additional annunciation location.

NOTE: PM023/4 modules used in the DS100 must be factory modified for this application.

Please see the diagrams for Normally Open and Normally Closed switch applications.

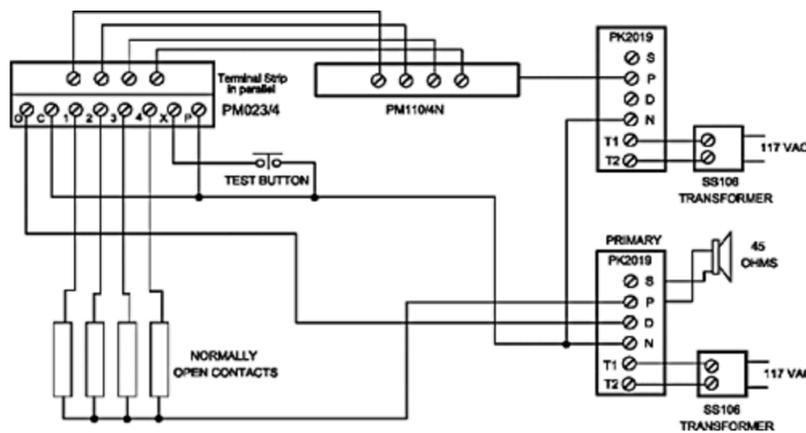

(Nov. 1997)