

### Features

- Easy installation
- Low-voltage operation
- Multiple applications
- Precision engineering


### Description

The PK601A is a 24 VDC power supply designed to power auxiliary signaling devices used in TekTone® emergency call systems. The unit provides a filtered 24 VDC output rated at 1 amp.

Although specifically designed for use with emergency call systems, the PK601A may also be used as a DC silent door opener adapter in TekTone apartment entrance systems.

### Specifications

Dimensions:	Height:	5"	(127 mm)
	Width:	2.375"	(60 mm)
	Depth:	2.25"	(57 mm)
Construction:	Quality electronic components mounted on a PC board encased in a rugged extruded aluminum housing		
Connections:	Screw terminals		
Mounting:	Surface		
Output voltage:	24 VDC		
Output current:	1 amp		
Power			
Requirements:	16 VAC, 30 VA		

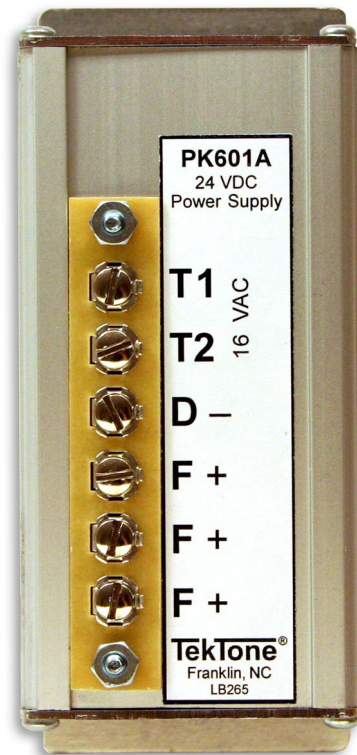

PK601A 24 VDC Power Supply

### Suggested Uses

*Tek-CARE®500 Wireless Nurse Call System*  
NC50xES-series Remote Receiver  
LI381, LI382 or LI382LED Dome Lights

*CM800 Emergency Call System*  
BE007 DC Corridor Bell  
PK612A DC Flasher

*Tek-ENTRY® Apartment Entry System*  
LI404B Auxiliary Strobe for Hearing Impaired  
PK205 Intercom Amplifier