

Features

- Easy installation
- Low voltage operation
- Multiple applications
- Precision engineering


Description

The PK601A is a 24 VDC power supply designed to power auxiliary signaling devices used in TekTone emergency call systems. The unit provides a filtered 24 VDC output rated at 1 amp.

Although specifically designed for use with emergency call systems, the PK601A may also be used as a DC silent door opener adapter in TekTone apartment entrance systems.

Specifications

Dimensions:	5"H × 2.37"W × 2.25"D (127 mm × 60 mm × 57 mm)
Construction:	Quality electronic components mounted on a PC board encased in a rugged extruded aluminum housing
Connections:	Screw terminals
Mounting:	Surface
Output voltage:	24 VDC
Output Current:	1 Amp
Power:	16 VAC, 30 VA

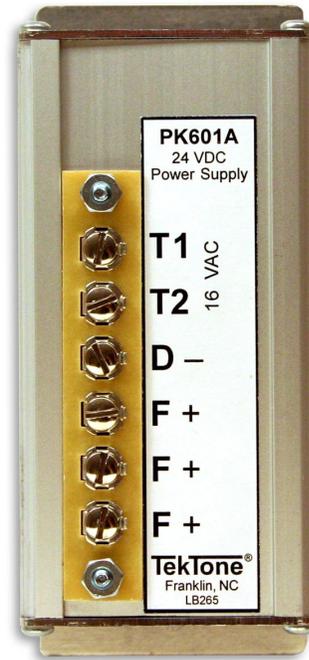

PK601A 24 VDC Power Supply

Suggested Uses

Tek-CARE® 500 Wireless Nurse Call System
NC50xES-series Remote Receiver
LI381, LI382 or LI382LED Dome Lights

CM800 Emergency Call System
BE007 DC Corridor Bell
PK612A Lamp Flasher

Tek-ENTRY Apartment Entry System
LI404B Strobe
PK205 Intercom Amplifier