

Features

- UL® 1069 Listed
- Supervised
- Microprocessor design
- Solid-state multiplex circuitry
- Field programmable for staff or patient station operation
- Programmable call priority
- All stations interchangeable
- Simplified multiplex wiring using plug-in type connectors
- Attractive flame retardant (UL® 94V-0) plastic panel

Description


The IR310E Staff Station provides reliable two-way, hands-free communication between the nurse master station and utility room, examination rooms, kitchen, or any location where staff members may need to originate calls or where cord sets are not required. Calls are placed by use of a momentary push button. Solid-state lights on the panel indicate that the call has been placed and that the intercom is in use.

As an additional feature, the staff station is field programmable to function as a patient station, if desired.

Listings



UL® 1069 listed; UL® File Number E71599.

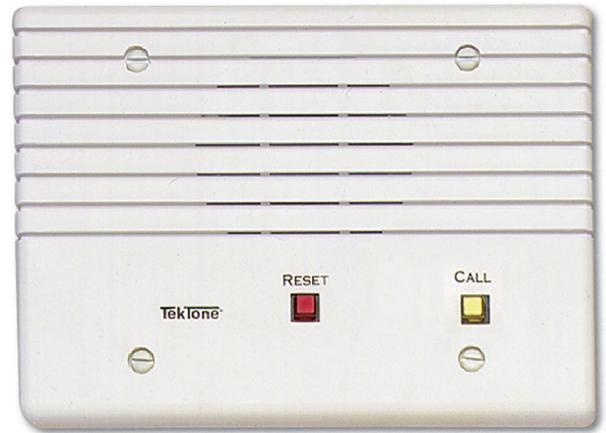

IR310E Staff Station

Specifications

Dimensions:	Height:	4.5"	(114 mm)
	Width:	6.375"	(162 mm)
	Depth:	2.75"	(70 mm)
	Projects:	0.5"	(12.7 mm)
Construction:	Flame retardant (UL® 94V-0) plastic		
Finish:	Light texture, white		
Speaker:	2.5" × 2.5" (64 mm × 64 mm)		
Connections:	Plug-in type		
Housing:	Steel City #H3BD with Steel City #3GC plaster ring or exact equal. Horizontal mount.		

Required Components

Tek-CARE®300II Nurse Call System