AM612-series Entrance Panel
IL525 Specification Sheet

Tek-ENTRY Apartment Entry Systems • Rev. 10 - 4/2022

Features

- Hands-free loud-speaking
- Weather-resistant Mylar speaker
- Self-wiping push-button switches
- Decorative end caps
- Individually replaceable name holders
- Slim-line surface-mount option
- Simple installation

Description

The AM612-series Entrance Panel is for use with TekTone® loud-speaker type suite stations.

Panels are equipped with a weather-resistant Mylar speaker protected by a black flame retardant polycarbonate plastic grill.

The anodized aluminum panel is available in two sizes. The 4.75" × 11.25" panel accommodates from 2 to 8 push buttons, and the 4.75" × 17.25" panel is used for applications requiring from 10 to 16 push buttons.

The speaker panel can accommodate up to 16 push buttons. In addition, the panel also contains up to 16 name holders with plastic lenses that snap easily into the panel and are individually replaceable.

Specifications

Dimensions:	11.25"H or 17.25"H × 4.75"W (285 mm or 438 mm × 120 mm)
Speaker:	2.5" (64 mm) voice frequency response
Push Button:	Individually replaceable with self-wiping contacts
Construction:	Anodized extruded aluminum panel
Housings:	OH600 Back Box for 2-8 buttons OH601 Back Box for 10-16 buttons
Surface mount:	Add “S” to panel part number (example: AM612/08S)
Name holders:	2.125" × 1.0625"

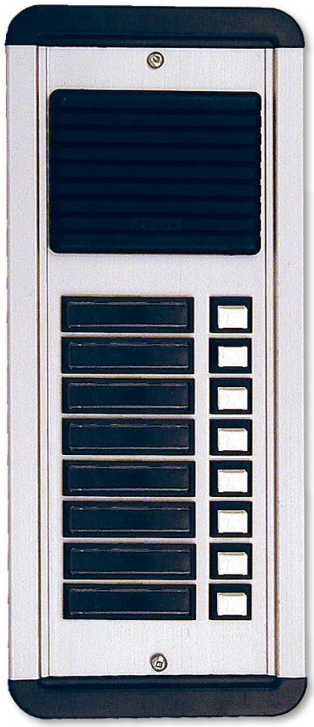

AM612-series Entrance Panel

Required Components

IR100-series or IR200-series Apartment Stations
PK543A Apartment Intercom Amplifier
SS102A Transformer
OH600 or OH601 Back Box (for flush mounted models)

www.tektone.com
324 Industrial Park Road • Franklin, NC 28734 • tektone@tektone.com
Phone: 828.524.9967 • Fax: 828.524.9968 • Sales: Choose option 2 • Tech Support: Choose option 3
TekTone's quality system is registered by DQS to the ISO 9001:2015 standard.